



RETICLE MANUAL


# **EBR-9**

## **MRAD RETICLE**


---

**VORTEX® EBR-9 MRAD RETICLE**

You have purchased a Vortex® rifle scope equipped with the EBR-9 MRAD reticle. Designed to maximize long-distance shooting and ranging abilities, the EBR-9 MRAD reticle can be used to effectively determine ranges, holdovers, and windage corrections.

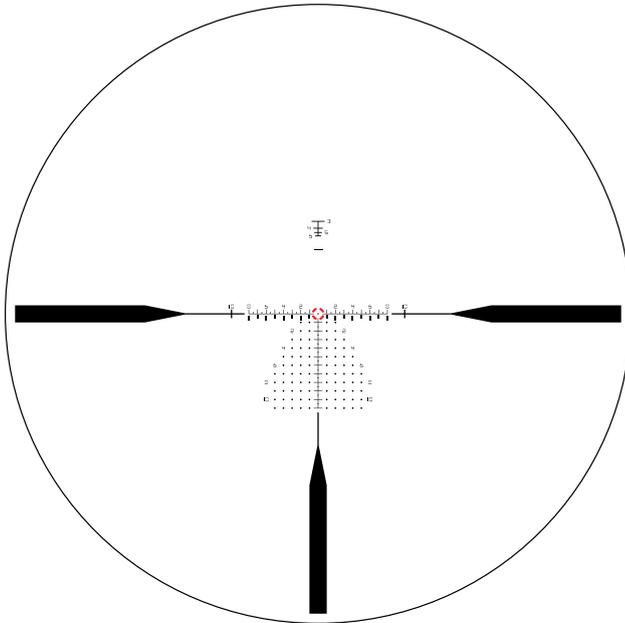



**Reticle Subtensions**

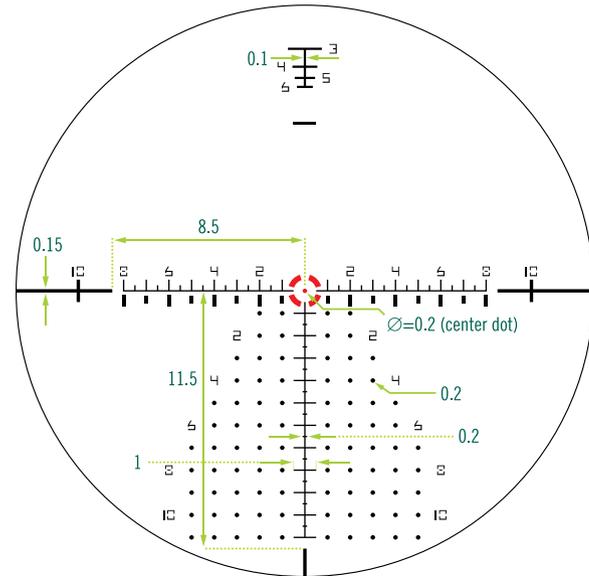

**Subtensions measured in MRAD.  
Reticle image shown for representation only.**

Images are for representation only. Product may vary slightly from what is shown.

Reticle Subtensions (Continued)

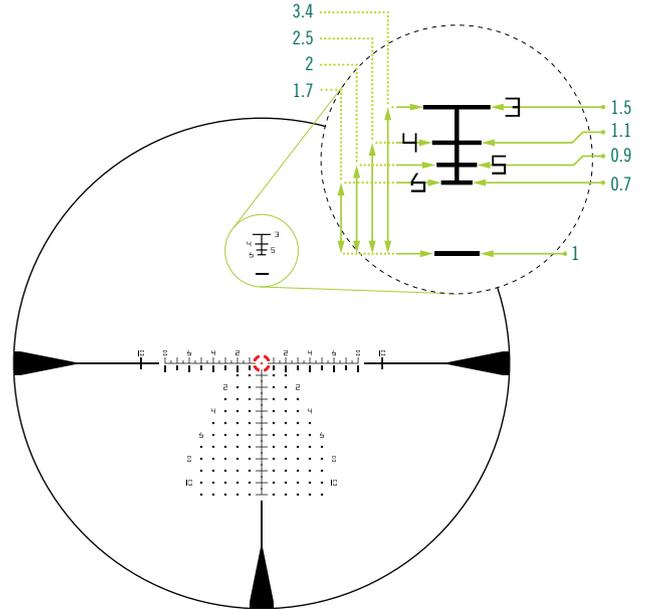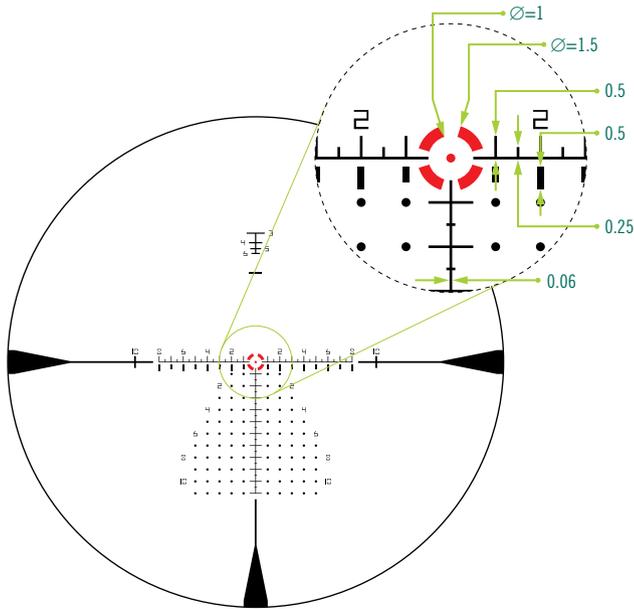


### MRAD Subtensions


The EBR-9 reticle is based on Milliradian (MRAD) subtensions. MRAD is an angular unit of measurement used to account for bullet drop, wind corrections, and range estimation. 1 MRAD will correspond to 3.6" for each 100 yards.

### First Focal Plane Reticles

This riflescope features a first focal plane (FFP) reticle. FFP reticles are located within the riflescope near the windage and elevation turrets, in front of the erector tube. This style of reticle will appear to grow and shrink as you change the magnification.




Low Magnification



High Magnification

### Elevation Holdovers

Correcting for bullet drop is easy with the EBR-9 reticle's .5 MRAD hashmarks. The shooter uses the bullet's drop in MRAD and holds on the corresponding hashmark.

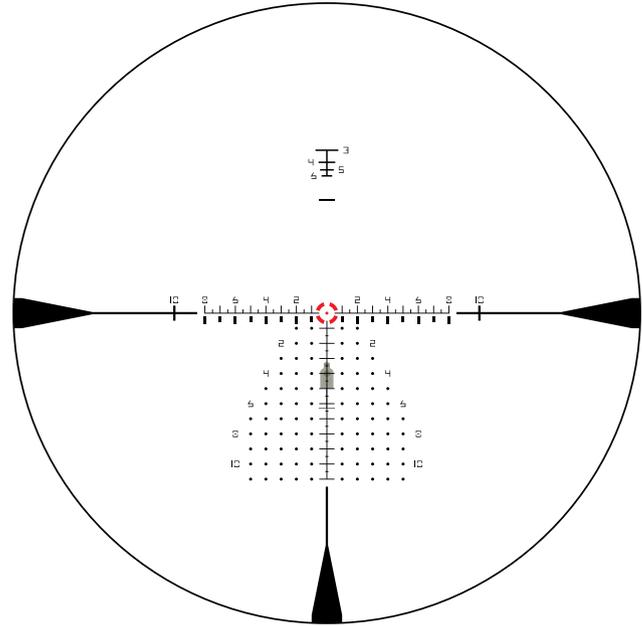


4 MRAD reticle holdover correction for 600 yd. shot. No wind.

**Note:** You can also use the reticle like a ruler when sighting-in and while making on-the-fly corrections. Measure the difference between the bullet's point of impact and your point of aim and either hold on that respective hashmark or dial in the correction on the turret, using the value of the corresponding hashmark.

### Basic Windage Correction Holdovers

When dialing elevation, use the horizontal stadia line for windage or moving target lead corrections.

#### Example

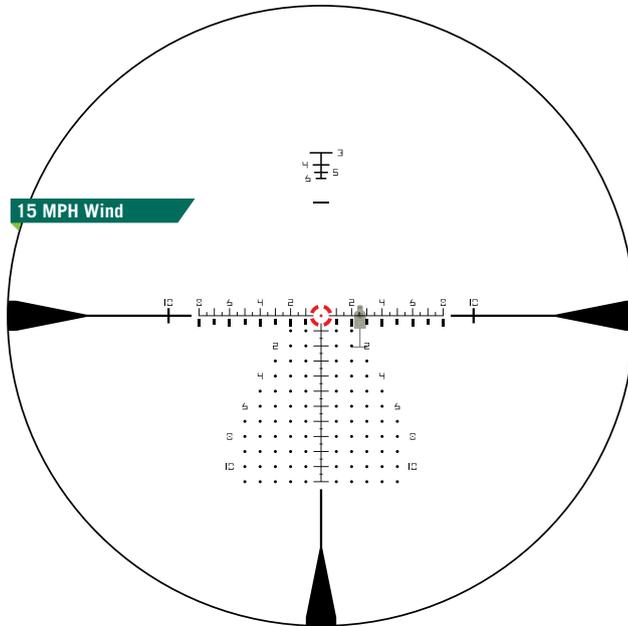


2.6 MRAD correction for 15 MPH wind at 700 yds.  
Elevation already dialed into turret.

### Basic Windage and Elevation Correction Holdovers

When using the reticle for elevation correction rather than dialing, you can use the MRAD windage and elevations dots for easy holdovers. Remember to hold the reticle into the wind.

#### Example

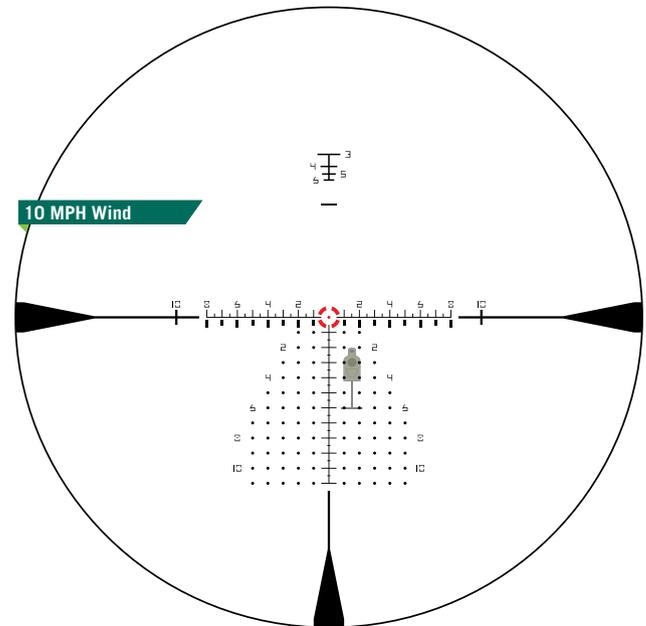


Using 3 MRAD drop line at 500 yds.  
1.5 MRAD correction for 10 MPH wind.

### Basic Moving Target Lead Correction

When estimating moving target leads, use the MRAD marks on the horizontal stadia line. Estimating moving target leads will require knowing distance, wind speed, moving target speed, and total bullet flight time (including rifle lock time). Bullet flight times can be roughly calculated based on FPS velocities or a ballistic calculator.

**Note:** Correctly estimating moving leads is difficult and requires practice and knowledge beyond the scope of this manual.

### Example

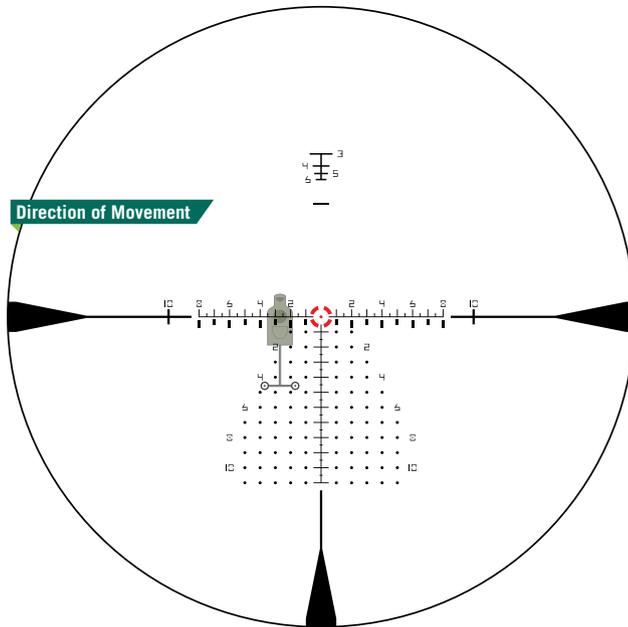

2.7 MRAD correction for target moving at 3 MPH. No wind.

## RANGING

MRAD measurements are effective for ranging using a simple formula. To use this formula, the shooter needs to know the size of the target or nearby object in yards, inches, meters, or cm.

### MRAD Ranging Formulas

$$\frac{\text{Target Size (yds.)}}{\text{Measured MRAD}} \times 1000 = \text{Range (yds.)}$$

$$\frac{\text{Target Size (inches)}}{\text{Measured MRAD}} \times 27.77 = \text{Range (yds.)}$$

$$\frac{\text{Target Size (inches)}}{\text{Measured MRAD}} \times 25.4 = \text{Range (m)}$$

$$\frac{\text{Target Size (m)}}{\text{Measured MRAD}} \times 1000 = \text{Range (m)}$$


$$\frac{\text{Target Size (cm)}}{\text{Measured MRAD}} \times 10 = \text{Range (m)}$$

For the most accurate solution, use the longest dimension. If the object is taller than it is wide, it is best to use the object's height in the formula.

Using either the vertical or horizontal MRAD scale, place the reticle on a target of known dimensions and read the number of MRAD spanned. You will obtain the best results if measured to the nearest 1/10 MRAD.

Accurate measuring will depend on a very steady hold. The rifle should be firmly braced using a rest or bipod when measuring. Once you have an accurate MRAD reading, use the formula to calculate the distance.

**Ranging Example**

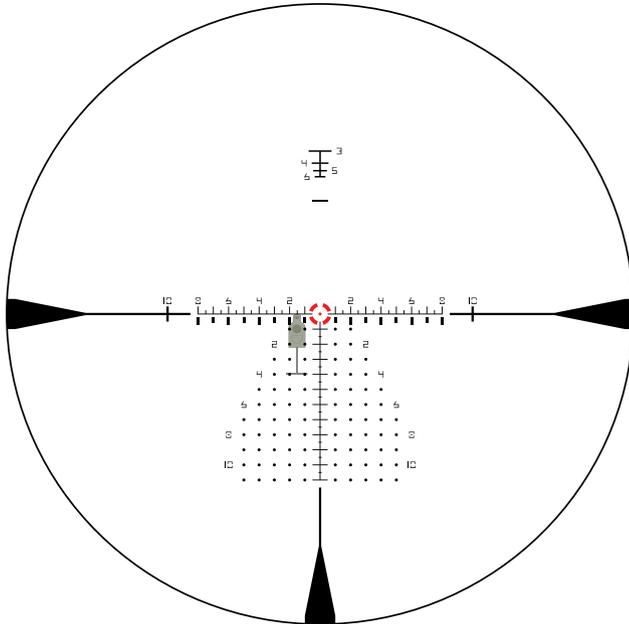


Ranging a 6' target (2 yds.) at 4 MRAD yields 500 yds.

$$\frac{2 \text{ yds.}}{4 \text{ MRAD}} \times 1000 = 500 \text{ yds.}$$

**Ranging Feature**

The ranging feature at the top of the reticle can be used to range a silhouette target. The horizontal lines correlate to the width of the shoulders of a silhouette target (18" across and 40" tall) at each distance. Place the horizontal hashmark at the base of the target. With the firearm supported, look at the top of the target to see which reference line the target aligns with. The 3, 4, 5, and 6 indicate the range in hundreds of meters.

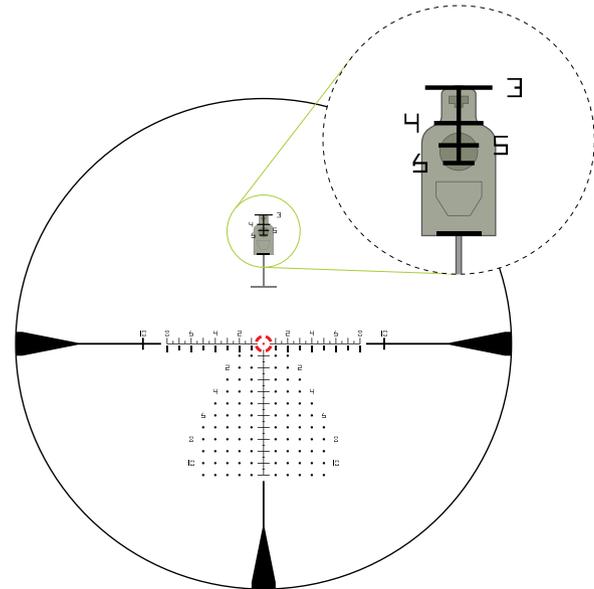



## **VIP WARRANTY**

**OUR UNCONDITIONAL PROMISE TO YOU.**

We promise to repair or replace the product. Absolutely free.

- ▶ **Unlimited.**
- ▶ **Unconditional.**
- ▶ **Lifetime Warranty.**

Learn more at [VortexOptics.com](http://VortexOptics.com)

[service@VortexOptics.com](mailto:service@VortexOptics.com) • 1-800-4VORTEX

*Note: The VIP Warranty does not cover loss, theft, deliberate damage, or cosmetic damage not affecting product performance.*

For additional and latest manuals, visit [VortexOptics.com](http://VortexOptics.com)



M-00273-1

© 2021 Vortex Optics

® Registered Trademark and TM Trademark of Vortex Optics. Patent Pending