



PRECISION RIFLESCOPE RINGS

30
mm
MEDIUM HEIGHT
0.97" / 24.64mm

TIGHTEST TOLERANCE. STRONGEST HOLD.

Vortex® Precision Rifle Scope Rings are kept in pairs throughout the manufacturing process ensuring perfection from one set to another. These rings are held to an extremely tight tolerance of .0005" and are serialized, vibratory tumbled, hand-bead blasted, and anodized with a Type III hard coat.

Caution: Ensure firearm is completely unloaded before making any modification. Unload, check inside the chamber, and remove any ammunition from the area.

Caution: Ensure all screws are securely tightened to the recommended torque before shooting.

Note: All torque specs are given as inch pounds (in-lbs) not foot pounds.

Attention: To properly mount your rifle scope we highly recommend using an inch/pound torque wrench. DO NOT exceed 18 in-lbs of torque on the ring's screws.


Installation Instructions

1. Remove the upper ring halves (keeping them paired as packaged) and place aside.
2. Loosen the base screws and fit the lower halves onto a Picatinny/Weaver® base.
3. Position to allow proper rifle scope placement for eye relief and even spacing on the rifle scope tube.
4. Individually tighten both base clamp screws while pressing the ring half down and forward, toward the muzzle, ensuring it is seated against a cross-slot in the rail. Tighten base clamp screws to 45-50 in-lbs.
5. Place the rifle scope onto the lower ring halves and loosely reattach the upper ring halves to the lower ring halves.
6. Slide and rotate the rifle scope for proper head position, eye relief, and vertical reticle alignment.
7. With the rifle scope properly positioned, alternately tighten the ring screws in a crisscross pattern. Tighten screws to 15-18 in-lbs while maintaining even spacing between the ring halves.

Note: Do not apply thread locker to the screws. Thread locking agents lubricate the threads, which can increase the applied torque.

SPECIFICATIONS	TUBE SIZE	30mm
	RING HEIGHT	Medium
	CENTER SCOPE HEIGHT	0.97" (24.64mm)
	MOUNT COMPATIBILITY	Picatinny/Weaver®
	CAP SCREW BIT SIZE	Torx® T-25
	BASE SCREW BIT SIZE	Torx® T-25
	CAP SCREW TORQUE	15-18 in-lbs
	BASE SCREW TORQUE	45-50 in-lbs
	WEIGHT (PER RING)	2.3 oz. (65.2g)
INCLUDED	▶ (2) Precision Rings ▶ T-25 Torx® Wrench	

- ▶ CERTIFIED USA 7075 T6 BILLET ALUMINUM
- ▶ HARD COAT ANODIZED
- ▶ ROBUST, GRADE 8 FASTENERS

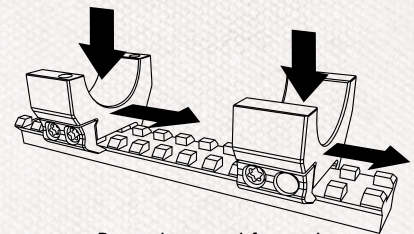

Press down and forward
(toward muzzle)
to seat base clamp.



SCAN FOR MOUNTING & ZEROING INSTRUCTIONS